


Instructions: Fairway Golf Car Bug Screen


Installation

1. Drape your Bug Screen over your golf car with the super-clear window at the front.
2. Pull your Bug Screen down over your golf car.
3. Attach the elastic hooked straps by each front wheel and behind each door to the bottom of your car.
4. Pull the elastic rear bottom hem of your Bug Screen over the car's rear bumper.

5. There is a golf bag panel on the back of your Bug Screen. This panel conforms to the bottom of your golf car so that your golf bags sit outside of your Bug Screen and can be easily accessed without opening your Bug Screen. The golf bag straps attached to the golf car pull through the openings in your Bug Screen (Fig.1).

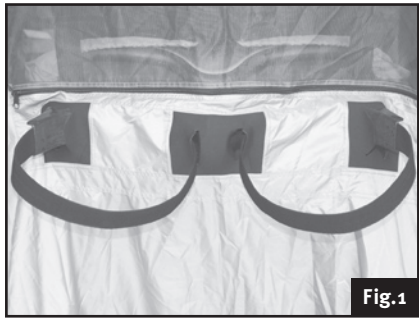

6. The side doors open with the zippers. To keep the doors open, roll them to the side and fasten them with the provided straps.

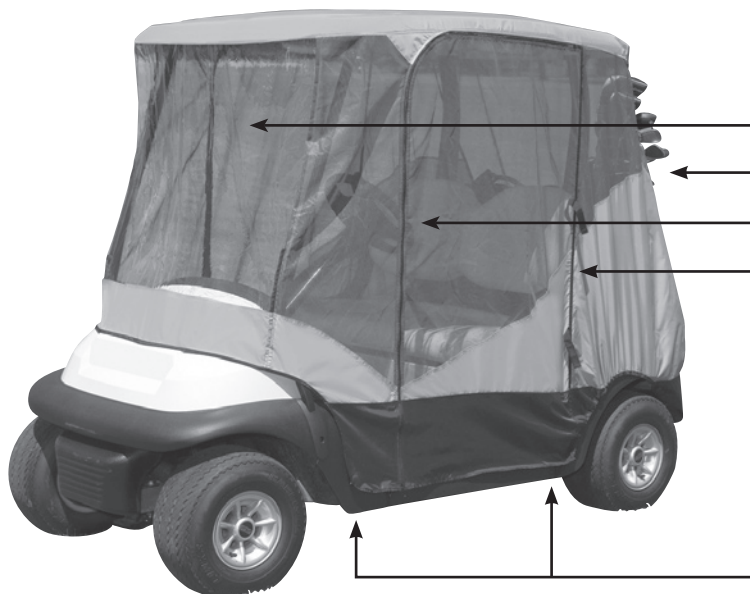

- Super-clear PVC front window
- Golf bag attachment openings
- Door entry and exit zipper
- The driver and passenger doors can be rolled to the side and held open with straps (doors are shown closed in this photo)
- Two hooked straps on each side secure your cover to the car

Storage

To store your Bug Screen simply roll it up and put it into its storage bag. **DO NOT STORE YOUR BUG SCREEN FOR LONG PERIODS WHEN WET**—it could mildew.

Cleaning

Clean your Bug Screen with warm water and a **SOFT** cloth.

Warranty

This product is factory warranted for defects in workmanship or materials for one year after purchase. Trailering or transporting your golf car with this Bug Screen on it will invalidate this warranty.



WE COVER YOUR GEAR™

Classic Accessories, Inc.
Kent, WA, USA 98032
www.classicaccessories.com

©2007